




# A New Generation in Drive Technology

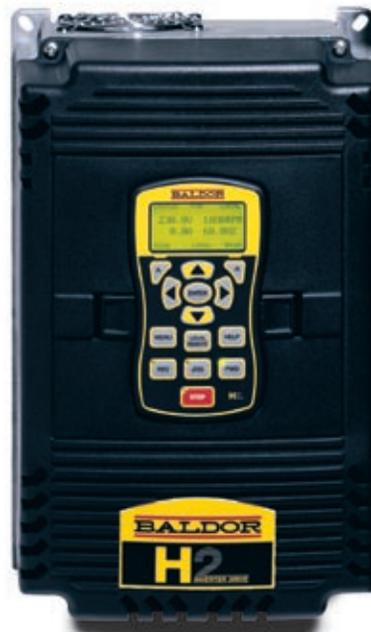

**Reliable. Easy to Use.  
High Performance.**

**BALDOR®**

## Baldor Drives: Unmatched Quality. Superior Reliability.

Baldor motors are recognized around the world as the standard for quality, reliability, and performance. Since we built our first electric motor in 1920, Baldor has earned a reputation for outstanding quality, unmatched reliability, and unsurpassed customer service.

That same level of commitment became the benchmark for our drives products beginning with the introduction of the “H” Series of inverter and vector drives. These products became known throughout the industry as the simplest drives to program and easiest to operate. The user-friendly approach was a result of developing the first harmonized family of drive products. Harmonized drives act and feel the same regardless of the voltage, power rating, or performance level your application requires. Today, we introduce the newest legacy of Baldor drives...the H2®.



The H2® Series is another example of our commitment to provide every customer with the best industrial drives available, backed by an extensive worldwide network of Baldor professionals. That same commitment drives us to excel with every product we make.

### Engineered and Manufactured for Superior Reliability

H2 drives are designed and manufactured in our Drives Center in Fort Smith, Arkansas, USA. Our Drives Center employees are dedicated to making the most reliable, industrial drives you can buy, and they work in one of the most productive manufacturing plants in the industry. Their level of experience, combined with a strict level of product testing, make every drive that leaves the Center one of the best in the world.

Every H2 drive is **stress tested** under rapid temperature excursions to verify the integrity of all components and connections. Circuit boards are **in-circuit tested** at the point of manufacture for 96.3% of all components and 100% of all circuit functions.

**Functional testing** of all input and output circuits on all circuit boards is performed at the point of

manufacture to verify the integrity and accuracy of all available combinations. Each design has its **operating software tested** for all combinations of parameter values, all combinations of terminal inputs and outputs, and all combinations of keystrokes to verify the code structure and operating efficiency. And, all drives are **dyno tested** at the point of final assembly to certify output power under various load conditions. This final test determines the correct calibration of current and voltage sensing circuitry.

### Secure Manufacturing

Consistent product availability is a critical factor when choosing any drives product. Baldor has taken steps to make certain the drives you need are there when you need them:

**Secured Second Source** of all electrical components and circuit board manufacturing is in place for uninterrupted product availability.

**Duplicate Test Fixtures** at all manufacturing locations ensure component and subassembly availability in case of natural or man-made disasters.

**Single Source Fixture Calibration** guarantees tight control of product specifications, mechanical fit and operating functionality.

## Unparalleled Ease of Use

What makes Baldor H2 drives the easiest to program and operate? The answer is simple... our drives are unlike any other because of the harmonized approach used when we began designing the H2 Series. The H2 Series is a family of drive products that share identical operator control, field installed options, programming style, operating characteristics and environmental compatibility. Even with the different technologies involved, the H2 utilizes a **common language**, so when you learn one...you learn them all! The removable keypads are interchangeable, interfacing with all H2 power bases, control boards, and expansion boards. The keypad screen displays the operating conditions and the programming steps in easy to follow text, eliminating the need to look up parameter numbers or program the wrong settings.

### Simple to Program and Operate

The Baldor H2 keypad makes operating, programming, and monitoring a snap. The keys on the keypad depress so you "feel" the key has been pushed. We also feature a 128 x 64 graphical display. Best of all, this easy to use keypad is harmonized to operate any H2 product in all power ranges.

Adjusting the control is as simple as it gets because of **block programming**. With the H2, you'll never have to scroll through every parameter to get to the one you need. With block programming, the adjustments are grouped in blocks of like adjustments.

The **H2 keypad** enclosure is rated NEMA 4X when mounted on a panel and is designed for remote mounting up to 200 feet away.

**ENGLISH DISPLAY:** The keypad displays operating conditions, programming steps, and help text in easy to follow English. **No difficult codes** to understand. Display can also be set to large fonts for the sight impaired.

**LED'S ON ACTION KEYS:** There is one LED on each of these keys: REV, JOG, FWD, and STOP. These LED's are "ON" whenever the COMMAND is active. The active LED assures the operator that the command has been received and accepted.

**NAVIGATION KEYS:** Navigation keys are extremely easy to use, allowing complete, full function navigation. Familiar up and down




keys along with left and right arrows **navigate effortlessly** through the display and programming functions.

### **PARAMETER SAVE and COPY:**

If several drives need to be programmed identically, the keypad can save all the control parameters from one drive and copy those parameters into another drive.

**HELP KEYS:** Every screen displayed on the keypad has **help text** available to aid the user. Simply press the help key to view the help text.

## High Performance

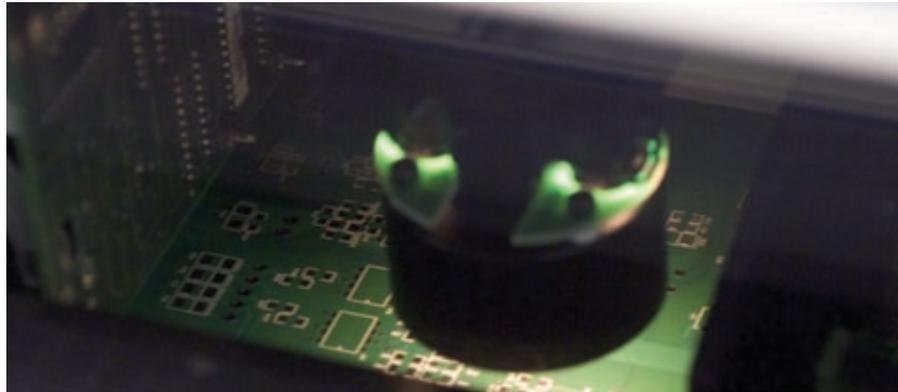

When we say our H2® Series offers high performance, we can prove it. Every product we make is extensively tested and performance verified. Only Baldor provides **Matched Performance™** performance data that goes far beyond the “typical” performance curves and instead provides actual laboratory dynamometer tested results. This extra effort, typically requiring 2-4 days of continuous testing, provides the solution to the concern, “What kind of constant torque and constant horsepower speed range will I get with this combination of motor and motor control?” Baldor Matched Performance testing makes it easier

for you to match the right motor and control so you get precisely the drive you need.

### Proven Performance

The motor and control methods used in the H2 drives have been fine tuned over many years in numerous applications and environmental conditions. Our design strategies of reducing motor stresses while increasing performance are realities in the new H2 drives, especially when matched with Baldor InverterDuty® and VectorDuty® motors. Our AC motor designs include ISR® magnet wire and balance specs that beat industry standards. As a



manufacturer of industrial motors and controls, we want to ensure a perfect match when you need a dependable drive for your industrial equipment.

### H2® Drives Pass the Environmental Performance Test

When it comes to **environmental compatibility**, Baldor H2 drives pass the test with flying colors. Environmentally sound operation is verified with extensive testing throughout the manufacturing process. All development testing is to extreme operating conditions. Baldor H2 drives surpass all industrial requirements for electromagnetic susceptibility, radiated noise, and conducted emissions. Plus, our drives are built environmentally friendly for future generations through the use of lead-free components and soldering techniques. All H2 drives meet regulations for post-use disposal.

Performance Comparison H2 Control Algorithms	Volts per Hertz Control	Encoderless Vector	Vector Drive	Servo Drive
Velocity Loop bandwidth in Hz without the Dynamic Brake Module (DB)	>1Hz w/o DB	10 Hz w/o DB	50 Hz w/o DB	100 Hz w/o DB
Minimum speed with full load (RPM)	90	20	0	0
Maximum speed with 25% load (RPM)	1.5 X Base Speed	2 X Base Speed	2.5 X Base Speed	2.0 X Base Speed
Minimum acceleration time (seconds)	3	1	0.1	0.01
Minimum deceleration time (seconds)	3	1	0.1 w/DB	0.01
Maximum starting torque (%)	150%	175%	200%	200%
Speed regulation at full load (%)	± 3% (base)	± 1% (base)	± 0.01% (set)	± 0.01% (set)

*The numbers above are for comparison only. Specific system dynamics will affect exact data.*

## Control for Every Application

The Baldor H2 family of drives operate three phase induction motors in several control modes as either an **open or closed loop control**. Open loop speed control is available as Inverter Volts per Hertz and Encoderless Vector. Closed loop Vector control is accomplished using a sophisticated fourth generation **space vector control algorithm** and motor feedback. Additional H2 drive models are available to control closed loop permanent magnet AC servomotors using motor feedback.

**Inverter Volts per Hertz** is the traditional method to control AC motors in adjustable speed applications. Easy setup and operation right out of the box make this control mode the most popular motor control method today. Used for a variety of applications that require adjustable speed operation and good speed regulation over a limited operating speed range including pumps, fans, and general machinery applications. Volts per Hertz is the control method of choice for applications where multiple motors are operated simultaneously from one motor control.

**Encoderless Vector operation** is available when tight speed and current control is desired in an open loop control environment. If you need near closed loop performance without the complexity of additional wiring and setup,



consider Encoderless Vector control. Using similar control algorithm as closed loop vector drives, low speed operation near zero speed is possible with good motor current control. If you're operating a process such as mixing that needs to detect when the desired viscosity is reached or metering pumps where tight speed control is required, then consider applying the Encoderless Vector control mode available in the H2 drives.

**Closed Loop Vector operation** is the ultimate control of AC induction motors. Using a motor mounted encoder, or similar feedback sensor, the control is able to precisely control motor torque and associated operating speed. Using fast microprocessors and current sensors, the H2 Vector Drive can segregate motor current into components that produce torque from the currents that produce motor heating. By minimizing the heating component of current and accurately controlling

the torque component of applied current, the motor will behave very much like a DC Motor but without the maintenance. Full torque at zero speed, ability to directly command motor torque, tight speed regulation, and high-speed motor operation are all available. Easy setup is accomplished with selectable rotational or stationary auto-tuning. Adaptive tuning will also automatically tweak the control loop adjustments while the motor is operating.

**Servo Control** of three phase permanent magnet motors is available in the H2 family of drive products. Modified Flux Vector control algorithm and motor mounted feedback sensor provide full AC Servo control with all the advantages of an industrial package and design. Full torque at zero speed, quick acceleration, fast positioning, auto-tuning, and adaptive tuning are available in an industrial rated enclosure.



**3/4 thru 3 HP**  
**1 thru 60 HP**  
**1 thru 125 HP**  
**1 thru 125 HP**

**120/240 VAC**  
**180-264 VAC**  
**340-528 VAC**  
**515-660 VAC**

**1 Phase - 50/60 Hz**  
**3 Phase - 50/60 Hz**  
**3 Phase - 50/60 Hz**  
**3 Phase - 60 Hz**

### Features

- NEMA 1 or NEMA 4X enclosure as standard
- Output frequency 0 to 500 Hz
- Peak overload capacity of 175%
- Separate accel/decel rates
- Controlled reversing
- Two and three input PID process control loop
- Selectable preset speeds
- Jog speed
- Plug-in I/O connectors
- Micro PLC functions

### Design Specifications

- Process follower 0-5 VDC, ±5 VDC, ±10 VDC, 0-20 mA, keypad network, serial, 0-10 VDC, 4-20 mA
- Coast or ramp to stop
- Dynamic braking
- DC injection braking
- 2 analog meter outputs
- 2 opto-isolated outputs
- 2 relay outputs
- Energy Optimization
- Adaptive Tuning

### Protective Features

- DC bus charge indicator
- Fault indicator
- Adjustable time based overload
- Cause of last 10 trips retained in memory
- Fault trace function
- Digital display for fault conditions with real time clock
- Linear heat sink thermal sensor
- Isolated control circuitry

<b>Output Ratings</b>	Overload Capacity	150% for 60 seconds; 175% for 3 seconds for constant torque 115% for 60 seconds for variable torque				
	Frequency	0-500 Hz standard				
	Voltage	0-Maximum input voltage (RMS)				
<b>Input Ratings</b>	Frequency	50 or 60 Hz ±5%				
	Voltage (VAC)	95-130	180-264	180-264	340-528	515-660
	Phase	Single Phase		Three phase (or single phase with derate)		
	Impedance	1% minimum from mains connection				
<b>Control Spec</b>	Control Method	Sinewave carrier input, Microprocessor controlled PWM output; selectable encoderless vector or V/Hz inverter				
	PWM Frequency	Adjustable 1-5 kHz standard, 5-16 kHz quiet				
	V/Hz Ratio	Linear to squared reduced, base frequency, output voltage, minimum frequency limit, maximum frequency limit				
	Torque Boost	0-30% of input voltage; automatic with manual override				
	Brake Torque	20% standard on Sizes AA and B, 1% standard on Size C				
	Skip Frequency	Three zones 0-Max frequency				
	Frequency Setting	±5 VDC, 0-5 VDC ± 10 VDC, 0-10 VDC, 4-20 mA, 0-20 mA, digital (keypad), Serial Comms/USB 2.0 and ModBus RTU standard				
	Accel/Decel	Separate accel/decel rates, 0-3600 sec to maximum frequency, linear, S-curve				
PC Setup Software	Workbench Software available via connection to USB 2.0 port for commissioning wizard, firmware download, parameter viewer, scope capture, and cloning					
<b>Protective Functions</b>	Inverter Trip	Over voltage, over current, under voltage, external trip, motor overload, over temperature (motor or control), output shorted or grounded				
	Stall Prevention	Over voltage suppression, overcurrent suppression				
	External Output	LED indicator for trip conditions, 4 assignable logic outputs, 2 assignable analog outputs				
	Short Circuit	Phase to phase, phase to ground				
<b>Keypad Display</b>	Running	Output frequency, set frequency, output current (%), voltage, motor RPM, custom units, power, energy consumed				
	Setting	Parameter values for setup and review				
	Trip	Separate message and trace log for each trip, last 10 trips retained in memory				
	Keys	14 key membrane with tactile response				
	Display	Backlit LCD 128 x 64 graphical display				
	Remote Mount	200 feet (60.6m) maximum from control				
<b>Ambient Conditions</b>	Temperature	-10 to + 45°C, derate 3% per degree C above 45°C to maximum ambient temperature of 55°C				
	Relative Humidity	NEMA 1 – 90% maximum RH non-condensing NEMA 4X – 100% condensing				
	Altitude	3300 feet (1000m), derate 2% per 1000 ft (303m) above 3300 ft				
	Shock	1G				
	Vibration	0.5G at 10 Hz to 60 Hz				
	Cooling	Forced air included when required				
	Duty Cycle	1.0				

**Options:** See page 12 for additional Expansion Boards including Ethernet, Isolated Input, etc. See page 13 for optional Dynamic Braking Assemblies.

# H2® Inverter Drive Output Ratings



With Quad Rating, each control can be setup to operate in one of four distinct operating zones. The zones are defined by the PWM frequency, continuous output current, and peak output current.

By selecting the desired Operating Zone, the control will automatically set the PWM frequency, continuous current, and peak current to the proper values for the desired Operating Zone.



Catalog Number	Input Volt	Size	H2 "Standard Drive" 2.5 kHz PWM Frequency										H2 "Quiet Drive" 8.0 kHz PWM Frequency									
			Constant Torque (Heavy Duty)					Variable Torque (Standard)					Constant Torque (Heavy Duty)					Variable Torque (Standard)				
			Input Amp	Output				Input Amp	Output				Input Amp	Output				Input Amp	Output			
				HP	kW	IC	IP		HP	kW	IC	IP		HP	kW	IC	IP		HP	kW	IC	IP
IHH201-E, W	240	AA	4.2	1	0.75	4.2	7.4	6.8	2	1.5	6.8	7.8	4.2	1	0.75	4.2	7.4	4.2	1	0.75	4.2	4.8
IHH202-E, W	240	AA	6.8	2	1.5	6.8	11.9	9.6	3	2.2	9.6	11	4.2	1	0.75	4.2	7.4	6.8	2	1.5	6.8	7.8
IHH203-E, W	240	AA	9.6	3	2.2	9.6	16.8	15.2	5	3.7	15.2	17.5	6.8	2	1.5	6.8	11.9	9.6	3	2.2	9.6	11
IHH205-E, W	240	AA	15.2	5	3.7	15.2	26.6	22	7.5	5.6	22	25.3	9.6	3	2.2	9.6	16.8	15.2	5	3.7	15.2	17.5
IHH207-E, W	240	AA	22	7.5	5.6	22	38.5	22	7.5	5.6	22	32.2	15.2	5	3.7	15.2	26.6	22	7.5	5.6	22	25.3
IHH210-E	240	B	28	10	7.5	28	49	42	15	11	42	48.3	22	7.5	5.6	22	39	28	10	7.5	28	32
IHH215-E	240	B	42	15	11	42	74	42	20	15	54	62	28	10	7.5	28	49	42	15	11	42	48
IHH220-E	240	B	54	20	15	55	96	42	20	15	54	62	42	15	11	42	74	56	20	15	54	62
IHH225-E	240	C	68	25	18.7	68	119	80	30	22.4	80	92	54	20	15	54	95	68	25	18.7	68	78
IHH230-E	240	C	80	30	22.4	80	140	104	40	30	104	120	78	25	18.7	68	119	80	30	22.4	80	92
IHH240-E	240	C	104	40	29	104	182	104	40	30	104	120	80	30	22.4	80	140	104	40	30	104	120
IHH250-E	240	D	130	50	37	130	228	154	50	37	154	177	104	40	29	104	182	130	50	37	130	167
IHH260-E	240	D	154	60	44	154	270	192	60	44	192	221	130	50	37	130	228	154	60	44	154	177
IHH401-E, W	480	AA	2.1	1	0.75	2.1	3.7	3.7	2	1.5	3.4	3.9	2.1	1	0.75	2.1	3.7	2.1	1	0.75	2.1	2.4
IHH402-E, W	480	AA	3.4	2	1.5	3.4	6	4.8	3	2.2	4.8	5.5	2.1	1	0.75	2.1	3.7	3.4	2	1.5	3.4	3.9
IHH403-E, W	480	AA	4.8	3	2.2	4.8	8.4	7.6	5	3.7	7.6	8.8	3.4	2	1.5	3.4	6	4.8	3	2.2	4.8	5.5
IHH405-E, W	480	AA	7.6	5	3.7	7.6	13.3	11	7.5	5.6	11	12.7	4.8	3	2.2	4.8	8.4	7.6	5	3.7	7.6	8.8
IHH407-E, W	480	AA	11	7.5	5.6	11	19.3	14	10	7.5	14	16.1	7.6	5	3.7	7.6	13.3	11	7.5	5.6	11	12.7
IHH410-E, W	480	AA	14	10	7.5	14	24.5	14	10	7.5	14	16.1	11.3	7.5	5.6	11	19.3	15	10	7.5	14	16.1
IHH415-E	480	B	21	15	11	21	37	27	20	15	27	33.8	14	10	7.5	14	24.5	21	15	11	21	24.2
IHH420-E	480	B	27	20	15	27	47	34	25	18.5	34	42.5	21	15	11	21	36.8	27	20	15	27	31
IHH425-E	480	B	34	25	18.5	34	60	40	30	22	40	50	27	20	15	27	47	34	25	18.5	34	39
IHH430-E	480	C	40	30	22	40	70	52	40	30	52	60	34	25	18.7	34	60	40	30	22	40	46
IHH440-E	480	C	52	40	30	52	91	65	50	37	65	75	40	30	22.4	40	70	52	40	30	52	60
IHH450-E	480	C	65	50	37	65	114	77	60	45	77	89	—	—	—	—	—	—	—	—	—	—
IHH460-E	480	D	77	60	44	77	135	96	75	56	96	110	65	50	37	65	114	77	60	44	77	89
IHH475-E	480	D	96	75	56	96	168	124	100	75	124	143	77	60	44	77	135	96	75	56	96	110
IHH4100-E	480	D	124	100	75	124	217	156	125	93	156	179	96	75	56	96	168	124	100	75	124	143
IHH4125-E	480	D	156	125	93	156	273	180	150	112	180	207	124	100	75	124	217	156	125	93	156	179
IHH501-E, W	600	AA	1.7	1	0.75	1.7	3	2.7	2	1.5	2.7	3.1	1.3	0.75	0.56	1.3	2.3	1.7	1	0.75	1.7	2
IHH502-E, W	600	AA	2.7	2	1.5	2.7	4.7	3.9	3	2.2	3.9	4.5	1.7	1	0.75	1.7	3	2.7	2	1.5	2.7	3.1
IHH503-E, W	600	AA	3.9	3	2.2	3.9	6.8	6.1	5	3.7	6.1	7	2.7	2	1.5	2.7	4.7	3.9	3	2.2	3.9	4.5
IHH505-E, W	600	AA	6.1	5	3.7	6.1	10.7	9	7.5	5.6	9	10.4	3.9	3	2.2	3.9	6.8	6.1	5	3.7	6.1	7
IHH507-E, W	600	AA	9	7.5	5.6	9	15.8	11	10	7.5	11	12.7	6.1	5	3.7	6.1	10.7	9	7.5	5.6	9	10.4
IHH510-E, W	600	AA	11.3	10	7.5	11	19.3	11	10	7.5	11	12.7	9.3	7.5	5.6	9	15.8	11.3	10	7.5	11	12.7
IHH515-E	600	B	17.5	15	11	17	30	23	20	15	22	25.3	11.3	10	7.5	11	19.3	18	15	11	17	19.6
IHH520-E	600	B	23	20	15	22	39	28	25	18.5	27	31	18	15	11	17	30	23	20	15	22	25
IHH525-E	600	B	28	25	18	27	47	28	25	18.5	32	36.8	23	20	15	22	39	28	25	18.5	27	31
IHH530-E	600	C	33	30	22	32	56	42	40	30	41	51	—	—	—	—	—	—	—	—	—	—
IHH540-E	600	C	42	40	30	41	72	56	50	37	52	60	—	—	—	—	—	—	—	—	—	—
IHH550-E	600	C	56	50	37	52	91	67	60	45	62	71	—	—	—	—	—	—	—	—	—	—
IHH560-E	600	D	62	60	44	62	109	77	75	56	77	89	52	50	37	52	91	62	60	44	62	71
IHH575-E	600	D	77	75	56	77	135	99	100	75	99	114	62	60	44	62	109	77	75	56	77	89
IHH5100-E	600	D	99	100	75	99	173	125	125	93	125	144	77	75	56	77	135	99	100	75	99	114
IHH5125-E	600	D	125	125	93	125	219	144	150	112	144	166	99	100	75	99	173	125	125	93	125	144
IHH601-E <sup>1</sup>	120	AA	12	1	0.75	4.2	7.4	20	2	1.5	6.8	7.8	7.4	0.75	0.56	3.2	5.6	12	1	0.75	4.2	4.8
	240	AA	6.3	1	0.75	4.2	7.4	10.2	2	1.5	6.8	7.8	4.8	0.75	0.56	3.2	5.6	6.3	1	0.75	4.2	4.8
IHH602-E <sup>1</sup>	120	AA	20	2	1.5	6.8	11.9	30	3	2.2	9.6	11	12	1	0.75	4.2	7.4	20	2	1.5	6.8	7.8
	240	AA	10.2	2	1.5	6.8	11.9	14.4	3	2.2	9.6	11	6.3	1	0.75	4.2	7.4	10.2	2	1.5	6.8	7.8
IHH603-E <sup>1</sup>	120	AA	30	3	2.2	9.6	16.8	30	3	2.2	9.6	11	20	2	1.5	6.8	11.9	30	3	2.2	9.6	11
	240	AA	14.4	3	2.2	9.6	16.8	14.4	3	2.2	9.6	11	10.2	2	1.5	6.8	11.9	14.4	3	2.2	9.6	11

1. Denotes single phase control.



**3/4 thru 3 HP**  
**1 thru 60 HP**  
**1 thru 125 HP**  
**1 thru 125 HP**

**120/240 VAC**  
**180-264 VAC**  
**340-528 VAC**  
**515-660 VAC**

**1 Phase - 50/60 Hz**  
**3 Phase - 50/60 Hz**  
**3 Phase - 50/60 Hz**  
**3 Phase - 60 Hz**

### Features

- NEMA 1 enclosure as standard
- Output frequency 0 to 500 Hz
- Peak overload capacity of 175%
- Automatic tuning to motor
- Full rated torque down to zero speed
- Digital speed or torque control
- Two and three input PID process control loop
- Linear or S-curve deceleration
- 15 preset speeds/positions
- Plug-in I/O connectors
- Micro PLC functions

### Design Specifications

- Motor shaft orient to marker
- Process follower 0-5 VDC,  $\pm 5$  VDC,  $\pm 10$  VDC, 0-20 mA, keypad network, serial, 0-10 VDC, 4-20 mA
- Coast or ramp to stop
- 2 assignable analog outputs
- 2 assignable opto outputs
- 2 assignable relay outputs
- 2 assignable analog inputs
- Adaptive tuning to load
- USB 2.0 full speed port
- ModBus RTU port

### Protective Features

- Adjustable current limit
- Isolated control circuitry
- Digital display for fault conditions with real time clock
- Fault track function
- Selectable automatic restart at momentary power loss
- DC bus charge indicator
- Cause of last 10 trips retained in memory
- 24 VDC isolated user supply
- Isolated encoder power supply

<b>Output Ratings</b>	Overload Capacity	150% for 60 seconds, 175% for 3 seconds for constant torque 115% for 60 seconds for variable torque				
	Frequency	0-500 Hz				
	Voltage	0-maximum input voltage (RMS)				
<b>Input Ratings</b>	Frequency	50 or 60 Hz $\pm 5\%$				
	Voltage (VAC)	95-130	180-264	180-264	340-528	515-660
	Phase	Single Phase		Three phase (or single phase with derate)		
	Impedance	1% minimum from mains connection				
<b>Control Spec</b>	Control Method	Microprocessor controlled PWM output, selectable closed loop vector; encoderless vector; or V/Hz inverter				
	PWM Frequency	Adjustable 1-5 kHz STD, 5-16 kHz quiet				
	Speed Setting	$\pm 5$ VDC, 0-5 VDC $\pm 10$ VDC, 0-10 VDC, 4-20 mA, 0-20 mA, digital (keypad), Serial Comms/USB 2.0, and ModBus RTU standard				
	Accel/Decel	0-3600 sec.				
	Motor Matching	Automatic tuning to motor with manual override				
	PC Setup Software	Workbench Software available via connection to USB 2.0 port for commissioning wizard, firmware download, parameter viewer, scope capture, and cloning				
<b>Motor Feedback</b>	Feedback Type	Incremental encoder coupled to motor shaft; optional resolver feedback				
	Pulses/Rev	50-20,000 selectable, 1024 standard				
	Voltage Output	2 channel in quadrature, 5 VDC, or 12 VDC differential				
	Marker Pulse	Required for position orientation				
	Power Input	5 VDC, 250 mA / 12 VDC, 200mA maximum				
	Max. Frequency	4 MHz				
	Positioning	Optional buffered encoder pulse train output for position loop controller				
<b>Protective Functions</b>	Vector Trip	Over voltage, over current, under voltage, external trip, motor overload, over temperature (motor or control), Output shorted or grounded, encoder loss				
	External Output	LED indicator for trip conditions, 4 assignable logic outputs, 2 assignable analog outputs				
	Short Circuit	Phase to phase, phase to ground				
<b>Keypad Display</b>	Running	Output frequency, motor RPM; output current (%), voltage, custom units, power, energy consumed				
	Setting	Parameter values for setup and review				
	Trip	Separate message and trace log for each trip, last 10 trips retained in memory				
	Keys	14 key membrane with tactile response				
	Display	Backlit LCD 128 x 64 graphical display				
	Remote Mount	200 feet (60.6m) maximum from control				
<b>Ambient Conditions</b>	Temperature	-10 to + 45°C, derate 3% per degree C above 45°C to maximum ambient temperature of 55°C				
	Relative Humidity	90% max RH non-condensing				
	Altitude	3300 feet (1000m), derate 2% per 1000 ft (303m) above 3000 ft				
	Vibration	0.5G at 10 to 60 Hz				
	Cooling	Forced air included when required				
	Duty Cycle	1.0				

**Options:** See page 12 for additional Expansion Boards including Ethernet, Isolated Input, etc. See page 13 for optional Dynamic Braking Assemblies.

# H2® Vector Drive Output Ratings

With Quad Rating, each control can be setup to operate in one of four distinct operating zones. The zones are defined by the PWM frequency, continuous output current, and peak output current.

By selecting the desired Operating Zone, the control will automatically set the PWM frequency, continuous current, and peak current to the proper values for the desired Operating Zone.



Catalog Number	Input Volt	Size	H2 "Standard Drive"										H2 "Quiet Drive"									
			2.5 kHz PWM Frequency										8.0 kHz PWM Frequency									
			Constant Torque (Heavy Duty)					Variable Torque (Standard)					Constant Torque (Heavy Duty)					Variable Torque (Standard)				
			Input Amp	Output				Input Amp	Output				Input Amp	Output				Input Amp	Output			
HP	kW	IC		IP	HP	kW	IC		IP	HP	kW	IC		IP	HP	kW	IC		IP			
ZHH201-E	240	AA	4.2	1	0.75	4.2	7.4	6.8	2	1.5	6.8	7.8	4.2	1	0.75	4.2	7.4	4.2	1	0.75	4.2	4.8
ZHH202-E	240	AA	6.8	2	1.5	6.8	11.9	9.6	3	2.2	9.6	11	4.2	1	0.75	4.2	7.4	6.8	2	1.5	6.8	7.8
ZHH203-E	240	AA	9.6	3	2.2	9.6	16.8	15.2	5	3.7	15.2	17.5	6.8	2	1.5	6.8	11.9	9.6	3	2.2	9.6	11
ZHH205-E	240	AA	15.2	5	3.7	15.2	26.6	22	7.5	5.6	22	25.3	9.6	3	2.2	9.6	16.8	15.2	5	3.7	15.2	17.5
ZHH207-E	240	AA	22	7.5	5.6	22	38.5	22	7.5	5.6	22	32.2	15.2	5	3.7	15.2	26.6	22	7.5	5.6	22	25.3
ZHH210-E	240	B	28	10	7.5	28	49	42	15	11	42	48.3	22	7.5	5.6	22	39	28	10	7.5	28	32
ZHH215-E	240	B	42	15	11	42	74	42	20	15	54	62	28	10	7.5	28	49	42	15	11	42	48
ZHH220-E	240	B	54	20	15	55	96	42	20	15	54	62	42	15	11	42	74	56	20	15	54	62
ZHH225-E	240	C	68	25	18.7	68	119	80	30	22.4	80	92	54	20	15	54	95	68	25	18.7	68	78
ZHH230-E	240	C	80	30	22.4	80	140	104	40	30	104	120	78	25	18.7	68	119	80	30	22.4	80	92
ZHH240-E	240	C	104	40	29	104	182	104	40	30	104	120	80	30	22.4	80	140	104	40	30	104	120
ZHH250-E	240	D	130	50	37	130	228	154	50	37	154	177	104	40	29	104	182	130	50	37	130	167
ZHH260-E	240	D	154	60	44	154	270	192	60	44	192	221	130	50	37	130	228	154	60	44	154	177
ZHH401-E	480	AA	2.1	1	0.75	2.1	3.7	3.7	2	1.5	3.4	3.9	2.1	1	0.75	2.1	3.7	2.1	1	0.75	2.1	2.4
ZHH402-E	480	AA	3.4	2	1.5	3.4	6	4.8	3	2.2	4.8	5.5	2.1	1	0.75	2.1	3.7	3.4	2	1.5	3.4	3.9
ZHH403-E	480	AA	4.8	3	2.2	4.8	8.4	7.6	5	3.7	7.6	8.8	3.4	2	1.5	3.4	6	4.8	3	2.2	4.8	5.5
ZHH405-E	480	AA	7.6	5	3.7	7.6	13.3	11	7.5	5.6	11	12.7	4.8	3	2.2	4.8	8.4	7.6	5	3.7	7.6	8.8
ZHH407-E	480	AA	11	7.5	5.6	11	19.3	14	10	7.5	14	16.1	7.6	5	3.7	7.6	13.3	11	7.5	5.6	11	12.7
ZHH410-E	480	AA	14	10	7.5	14	24.5	14	10	7.5	14	16.1	11.3	7.5	5.6	11	19.3	15	10	7.5	14	16.1
ZHH415-E	480	B	21	15	11	21	37	27	20	15	27	33.8	14	10	7.5	14	24.5	21	15	11	21	24.2
ZHH420-E	480	B	27	20	15	27	47	34	25	18.5	34	42.5	21	15	11	21	36.8	27	20	15	27	31
ZHH425-E	480	B	34	25	18.5	34	60	40	30	22	40	50	27	20	15	27	47	34	25	18.5	34	39
ZHH430-E	480	C	40	30	22	40	70	52	40	30	52	60	34	25	18.7	34	60	40	30	22	40	46
ZHH440-E	480	C	52	40	30	52	91	65	50	37	65	75	40	30	22.4	40	70	52	40	30	52	60
ZHH450-E	480	C	65	50	37	65	114	77	60	45	77	89	—	—	—	—	—	—	—	—	—	—
ZHH460-E	480	D	77	60	44	77	135	96	75	56	96	110	65	50	37	65	114	77	60	44	77	89
ZHH475-E	480	D	96	75	56	96	168	124	100	75	124	143	77	60	44	77	135	96	75	56	96	110
ZHH4100-E	480	D	124	100	75	124	217	156	125	93	156	179	96	75	56	96	168	124	100	75	124	143
ZHH4125-E	480	D	156	125	93	156	273	180	150	112	180	207	124	100	75	124	217	156	125	93	156	179
ZHH501-E	600	AA	1.7	1	0.75	1.7	3	2.7	2	1.5	2.7	3.1	1.3	0.75	0.56	1.3	2.3	1.7	1	0.75	1.7	2
ZHH502-E	600	AA	2.7	2	1.5	2.7	4.7	3.9	3	2.2	3.9	4.5	1.7	1	0.75	1.7	3	2.7	2	1.5	2.7	3.1
ZHH503-E	600	AA	3.9	3	2.2	3.9	6.8	6.1	5	3.7	6.1	7	2.7	2	1.5	2.7	4.7	3.9	3	2.2	3.9	4.5
ZHH505-E	600	AA	6.1	5	3.7	6.1	10.7	9	7.5	5.6	9	10.4	3.9	3	2.2	3.9	6.8	6.1	5	3.7	6.1	7
ZHH507-E	600	AA	9	7.5	5.6	9	15.8	11	10	7.5	11	12.7	6.1	5	3.7	6.1	10.7	9	7 1/2	5.6	9	10.4
ZHH510-E	600	AA	11.3	10	7.5	11	19.3	11	10	7.5	11	12.7	9.3	7.5	5.6	9	15.8	11.3	10	7.5	11	12.7
ZHH515-E	600	B	17.5	15	11	17	30	23	20	15	22	25.3	11.3	10	7.5	11	19.3	18	15	11	17	19.6
ZHH520-E	600	B	23	20	15	22	39	28	25	18.5	27	31	18	15	11	17	30	23	20	15	22	25
ZHH525-E	600	B	28	25	18	27	47	28	25	18.5	32	36.8	23	20	15	22	39	28	25	18.5	27	31
ZHH530-E	600	C	33	30	22	32	56	42	40	30	41	51	—	—	—	—	—	—	—	—	—	—
ZHH540-E	600	C	42	40	30	41	72	56	50	37	52	60	—	—	—	—	—	—	—	—	—	—
ZHH550-E	600	C	56	50	37	52	91	67	60	45	62	71	—	—	—	—	—	—	—	—	—	—
ZHH560-E	600	D	62	60	44	62	109	77	75	56	77	89	52	50	37	52	91	62	60	44	62	71
ZHH575-E	600	D	77	75	56	77	135	99	100	75	99	114	62	60	44	62	109	77	75	56	77	89
ZHH5100-E	600	D	99	100	75	99	173	125	125	93	125	144	77	75	56	77	135	99	100	75	99	114
ZHH5125-E	600	D	125	125	93	125	219	144	150	112	144	166	99	100	75	99	173	125	125	93	125	144
ZHH601-E <sup>1</sup>	120	AA	12	1	0.75	4.2	7.4	20	2	1.5	6.8	7.8	7.4	0.75	0.56	3.2	5.6	12	1	0.75	4.2	4.8
	240	AA	6.3	1	0.75	4.2	7.4	10.2	2	1.5	6.8	7.8	4.8	0.75	0.56	3.2	5.6	6.3	1	0.75	4.2	4.8
ZHH602-E <sup>1</sup>	120	AA	20	2	1.5	6.8	11.9	30	3	2.2	9.6	11	12	1	0.75	4.2	7.4	20	2	1.5	6.8	7.8
	240	AA	10.2	2	1.5	6.8	11.9	14.4	3	2.2	9.6	11	6.3	1	0.75	4.2	7.4	10.2	2	1.5	6.8	7.8
ZHH603-E <sup>1</sup>	120	AA	30	3	2.2	9.6	16.8	30	3	2.2	9.6	11	20	2	1.5	6.8	11.9	30	3	2.2	9.6	11
	240	AA	14.4	3	2.2	9.6	16.8	14.4	3	2.2	9.6	11	10.2	2	1.5	6.8	11.9	14.4	3	2.2	9.6	11

1. Denotes single phase control.



**3 thru 54 Amps**  
**3 thru 27 Amps**

**180-264 VAC**  
**340-528 VAC**

**3 Phase - 50/60 Hz**  
**3 Phase - 50/60 Hz**

### Features

- NEMA 1 enclosure as standard
- Peak overload capacity up to 200%
- Industry standard  $\pm 10$  VDC input command
- Optional expansion boards
- Digital speed control or torque control
- Auto tuning to motor with manual-override
- Plug-in I/O connectors
- Programmable linear or S-curve acceleration
- Isolated control circuitry
- 24 VDC isolated user supply
- 15 preset speeds/positions

### Design Specifications

- IGBT power devices
- Process follower capability
- Simulated quadrature encoder output with index pulse
- 9 opto-isolated inputs
- 2 assignable analog outputs
- 2 assignable logic outputs
- 2 assignable relay outputs
- 2 assignable analog inputs
- USB 2.0 full speed port

### Protective Features

- Motor overspeed
- Adjustable current limit
- Digital display for fault conditions with real time clock
- Fault trace functions
- Manual restart
- Over/Under voltage
- Line to line and line to ground faults
- Over-temperature
- Motor overload

<b>Output Ratings</b>	Overload Capacity	200% for 3 seconds (quiet constant torque mode) 150% for 60 seconds (constant torque mode)
	Output Current	See ratings table
	Voltage	0 to maximum input VAC
<b>Input Ratings</b>	Frequency	50 or 60 Hz $\pm 5\%$
	Voltage	240 VAC (180-264 VAC), 480 VAC (340-528 VAC)
	Phase	Three phase (or single phase with derate)
	Impedance	1% minimum from mains connection
<b>Control Spec</b>	Control Method	Microprocessor controlled PWM output; field oriented vector control
	PWM Frequency	Standard 8 kHz - Adjustable 1-16 kHz
	Speed Setting	$\pm 5$ VDC, 0-5 VDC $\pm 10$ VDC, 0-10 VDC, 4-20 mA, 0-20 mA, digital (keypad), Serial Comms/USB 2.0, and ModBus RTU standard
	Velocity Loop Bandwidth	Theoretical open loop 100 Hz maximum
	Current Loop Bandwidth	Adjustable to 1500 Hz
	Max. Output Frequency	500 Hz
	Motor Matching	Auto-tuning to motor with manual override
	PC Setup Software	Workbench Software available via connection to USB 2.0 port for commissioning wizard, firmware download, parameter viewer, scope capture, and cloning
<b>Motor Feedback</b>	Feedback Type	Resolver coupled to motor shaft
	Sine/Cosine Inputs	4.2 V <sub>RMS</sub> $\pm 10\%$ (maximum coupled)
	Excitation (Reference Voltage)	8.4 V <sub>RMS</sub> @ 10 kHz
	Transformation Ratio	0.5 only
	Positioning	Output for position loop controller, simulated encoder 1024 ppr quadrature with index
<b>Protective Functions</b>	Servo Trip	Over voltage, over current, under voltage, external trip, motor overload, over temperature (motor or control), output shorted or grounded, resolver loss
	External Output	LED indicator for trip conditions, 4 assignable logic outputs, 2 assignable analog outputs
	Short Circuit	Phase to phase, phase to ground
<b>Keypad Display</b>	Running	Output frequency, set frequency, output current (%), voltage, motor RPM, custom units, power, energy consumed
	Setting	Parameter values for setup and review
	Trip	Separate message for each trip, last 10 trips retained in memory
	Keys	14 key membrane with tactile response
	Display	Backlit LCD; 128 x 64 graphical display
	Remote Mount	200 feet (60.6m) maximum from control
<b>Ambient Conditions</b>	Temperature	-10 to + 45°C, derate 3% per degree C above 45°C to maximum ambient temperature of 55°C
	Relative Humidity	90% maximum RH non-condensing
	Altitude	3300 feet (1000m), derate 2% per 1000 ft (303m) above 3000 ft
	Shock	1G
	Vibration	0.5G at 10 to 60 Hz
	Cooling	Forced air included when required
	Duty Cycle	1.0

**Options:** See page 12 for additional Expansion Boards including Ethernet, Isolated Input, etc. See page 13 for optional Dynamic Braking Assemblies.

## H2<sup>®</sup> AC Servo Control Output Ratings

Catalog Number	Input Volt	Size	H2 "Quiet Drive" 8.0 kHz PWM Frequency			H2 "Standard Drive" 2.5 kHz PWM Frequency				
			Input Amp	Output		Input Amp	Output			
				KW	IC		IP	KW	IC	IP
SHH2A03-E	240	AA	3.2	0.56	3.2	6.4	4.2	0.75	4.2	7.4
SHH2A04-E	240	AA	4.2	0.75	4.2	8.4	6.8	1.5	6.8	11.9
SHH2A07-E	240	AA	6.8	1.5	6.8	13.6	9.6	2.2	9.6	16.8
SHH2A10-E	240	AA	9.6	2.2	9.6	19.2	15.2	3.7	15.2	26.6
SHH2A15-E	240	AA	15.2	3.7	15.2	30.4	22	5.6	22	38.5
SHH2A22-E	240	B	22	5.6	22	44	28	7.5	28	49
SHH2A28-E	240	B	28	7.5	28	56	42	11	42	74
SHH2A42-E	240	B	42	11	42	84	57	15	55	96
SHH2A54-E	240	C	56	15	54	94.5	70	18.5	68	119
SHH4A02-E	480	AA	2.1	0.75	2.1	4.2	2.1	0.75	2.1	3.7
SHH4A03-E	480	AA	3.4	1.5	3.4	6.8	3.4	1.5	3.4	6
SHH4A05-E	480	AA	4.8	2.2	4.8	9.6	4.8	2.2	4.8	8.4
SHH4A08-E	480	AA	7.6	3.7	7.6	15.2	7.6	3.7	7.6	13.3
SHH4A11-E	480	AA	11.3	5.6	11	22	11	5.6	11	19.3
SHH4A14-E	480	B	15	7.5	14	28	14.4	7.5	14	25
SHH4A21-E	480	B	22	11	21	42	21.6	11	21	37
SHH4A27-E	480	B	28	15	27	54	28	15	27	47

## Keypad Extension Cables

For the convenience of our customers, we offer a connected plug/cable assembly. This assembly provides the connectors from the keypad to the control for remote keypad operation.

Catalog Number	Cable Extension Length	Approx. Ship. Wt.
CBLHH015KP	5 feet (1.5 meter)	1
CBLHH030KP	10 feet (3.0 meter)	1
CBLHH046KP	15 feet (4.6 meter)	1
CBLHH061KP	20 feet (6.1 meter)	2
CBLHH091KP	30 feet (9.1 meter)	3
CBLHH152KP	50 feet (15.2 meter)	3
CBLHH229KP	75 feet (22.9 meter)	4
CBLHH305KP	100 feet (30.5 meter)	5
CBLHH457KP	150 feet (45.7 meter)	6
CBLHH610KP	200 feet (61.0 meter)	7




## H2® Workbench Application Development Tool

Included as a standard feature with every H2 drive is a copy of H2 Workbench, a PC based application development tool. Workbench is an extremely easy to use programming tool that can be used for a variety of functions:

- Commissioning Wizard
- Software Oscilloscope
- Parameter View/Edit
- Drive Monitoring
- On-Line Help
- Spy Window
- Software Download
- Drive I/O Configuration

An example of the built-in software oscilloscope is shown at right. Real time information can be saved and graphed to give a visual display of the selected control profile. H2 Workbench is also used as the programming interface into the Mint® Expansion Board.

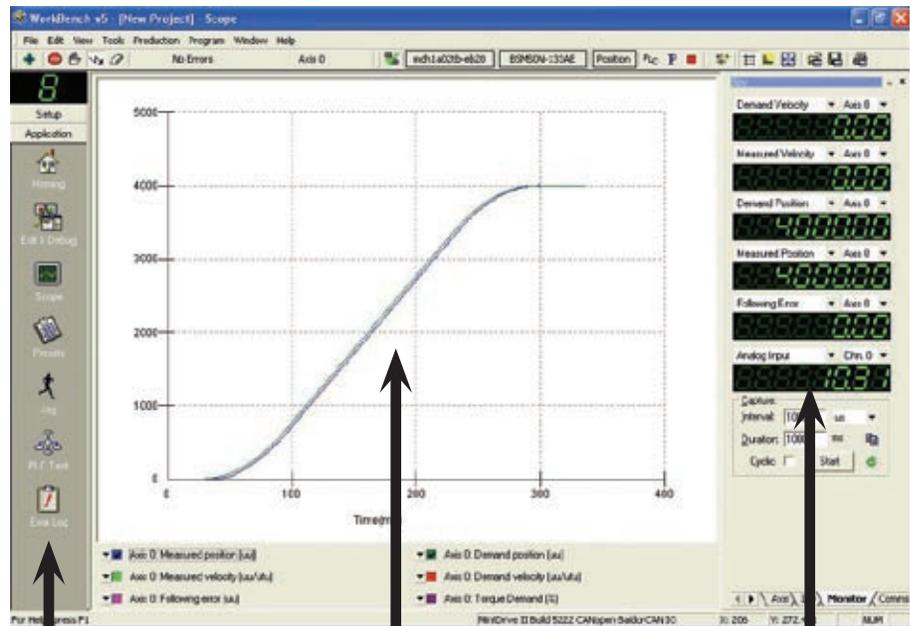

### Toolbar:

- Single click navigation
- Quick access to useful tools
- Easy to use graphical prompts

### Software Oscilloscope:

- Digitally capture data
- Save and print captured traces
- Commanded and actual values
- User configurable color scheme

### Spy Window:

- User selectable
- Velocity
- Bus voltage
- Motor current
- Control temp
- Position
- Position error

## Mint®...the Simple Approach to Motion Control



Originally created over 15 years ago, Baldor's Mint motion language is now available for Baldor H2 drives. The language that made motion control easy to setup and program has been refined and thoroughly tested in thousands

of applications. With the addition of a Mint Expansion Board, any H2 Vector or Servo drive is upgraded to include complete position controller capability for a single axis of motor operation.

Positioning capabilities include Master Axis Follower, Electronic Gearbox, Flying Shears, Registration, Virtual Master, and Cam functions. The master encoder input supports differential inputs for A, B, and C

(index pulse). Extension of the global control platform using a CANopen channel for connection to an additional I/O breakout box or CAN operator terminals is also possible.

Mint is one of the most widely used motion programming languages in the world. When combined with the reliability and ease of use of a H2 drive, the performance you experience is second to none.

## Expansion and Accessory Boards

Baldor H2 drives offer a wide variety of plug-in expansion boards to allow controls to be interfaced with various inputs and outputs. One, two or three expansion boards may be mounted into the control to custom tailor the inputs, outputs, and feedback requirements to the application. Baldor also offers several expansion boards that allow direct interfacing with popular PLC's. Depending on the choice, these may consist of an expansion board, software, or a combination of both.

All H2 drives include a Modbus RTU Communications port as standard.

### Ethernet Server Board

Baldor makes remote monitoring and control adjusting easier than

ever before with our Ethernet server connection expansion board. This expansion board allows connection with the Ethernet, using a standard web browser, giving the operator point and click setup and monitoring of all Baldor H2 drives. Best of all, no additional program is necessary because the control acts as a server to build HTML pages on your desktop computer screen!

## Additional Expansion Boards

### Isolated Input Board (90-130


**Volts):** This board replaces the opto inputs on the main control board with isolated inputs. All inputs must be in the same voltage range and one side of all inputs is common.

Screw terminals are provided for easy installation.

**Master Pulse Reference/Pulse Follower:** This board is software selectable to create a master pulse reference based on the control's speed/direction command or can be selected as an isolated pulse follower. The follower's ratio can be increased or decreased using the keypad. The master or follower pulse train can also be configured as a two channel quadrature pulse with complements or configured as a one channel pulse train for speed and one channel for direction. As a follower, the pulse train can be scaled and retransmitted to the next follower as received from the master.

### High Resolution Analog:

Contains two high resolution inputs to be used as additional analog sources to the control. The resolution is as follows:  
 $\pm 10$  VDC = 16 bit, 0-10 VDC = 15 bit,  $\pm 5$  VDC = 15 bit, 0-5 VDC = 14 bit, 4-20 mA = 15 bit, and 0-20 mA = 15 bit. Also contains two high resolution analog outputs in addition the 2 outputs already on the control board. The outputs are selectable for  $\pm 10$  VDC, 0-10 VDC,  $\pm 5$  VDC, 0-5 VDC, 4-20 mA, and 0-20mA with inverting capability.

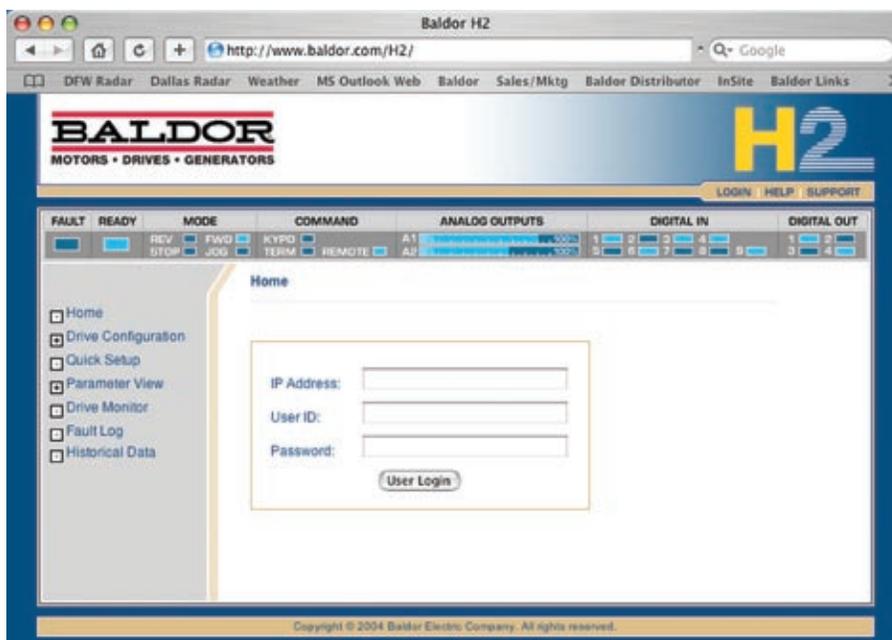

## Bus Communication Expansion Boards

The ability to communicate is important in industrial automation and even more important in the areas of drives and process control. Baldor H2 drives offer a variety of optional plug-in expansion boards that connect directly to several

popular PLC and plant automation networks including: DeviceNet, Ethernet IP, Profibus DP, and Lonworks.

As a standard feature, the H2 drives include a Modbus RTU communications port. If you need

your drives to communicate to cells of other machines, or large plant automation networks, the Baldor H2 drive family can do the talking...and listening too!

Catalog Number	Description
EXBHH001A01	Ethernet Server Expansion Board
EXBHH002A01	Mint® Expansion Board
EXBHH003A01	Isolated Input Expansion Board
EXBHH005A01	High Resolution Analog Board
EXBHH007A01	Master Pulse Reference / Isolated Pulse Follower
EXBHH012A01	Ethernet IP Communications Expansion Board
EXBHH013A01	DeviceNet Expansion Board
EXBHH014A01	Profibus DP Expansion Board
EXBHH016A01	LonWorks Communications Expansion Board



## Dynamic Braking Resistor Assemblies

For those applications that require the motor to reverse quickly or stop faster than the built-in braking allows, additional capabilities can be added to any H2 drive. No need for an additional



transistor as Baldor includes an internal transistor with every unit. Dynamic Braking Resistor Assemblies include braking resistors completely assembled and mounted into a NEMA 1 enclosure.

Selecting the braking resistor is as easy as choosing the correct ohm value for the control and adequate continuous watts capacity to meet load requirements.



Input Volts	Hp	Total Ohms	Continuous Rated Watts						
			600	1200	2400	4800	6400	9600	14200
240	1-7.5	20	RGA620	RGA1220	RGA2420				
	10-20	6		RGA1206	RGA2406	RGA4806			
	25-40	4		RGA1204	RGA2404	RGA4804			
	50-60	2				RGA4802	RGA6402	RGA9602	RGA14202
480	1-3	120	RGA6120	RGA12120	RGA24120				
	5-7.5	60	RGA660	RGA1260	RGA2460	RGA4860			
	10	30	RGA630	RGA1230	RGA2430	RGA4830			
	15-25	20	RGA620	RGA1220	RGA2420	RGA4820			
	30-60	10		RGA1210	RGA2410	RGA4810			
600	75-125	4		RGA1204	RGA2404	RGA4804	RGA6404	RGA9604	RGA14204
	1-3	120	RGA6120	RGA12120	RGA24120				
	5-10	60	RGA660	RGA1260	RGA2460	RGA4860			
	15-25	30	RGA630	RGA1230	RGA2430	RGA4830			
	30	24		RGA1224	RGA2424	RGA4824			
	40-125	14				RGA4814	RGA6414		

## Outline and Dimensions

### Size AA, B and C Controls

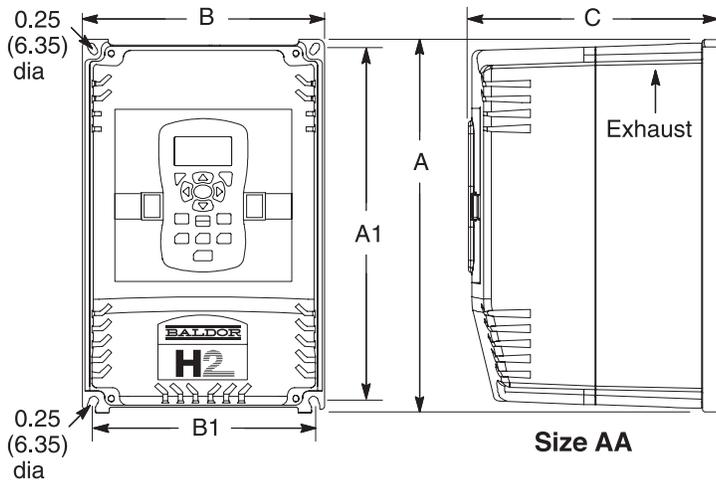

Size	# Holes	Diameter
AA	4	0.6 (15)

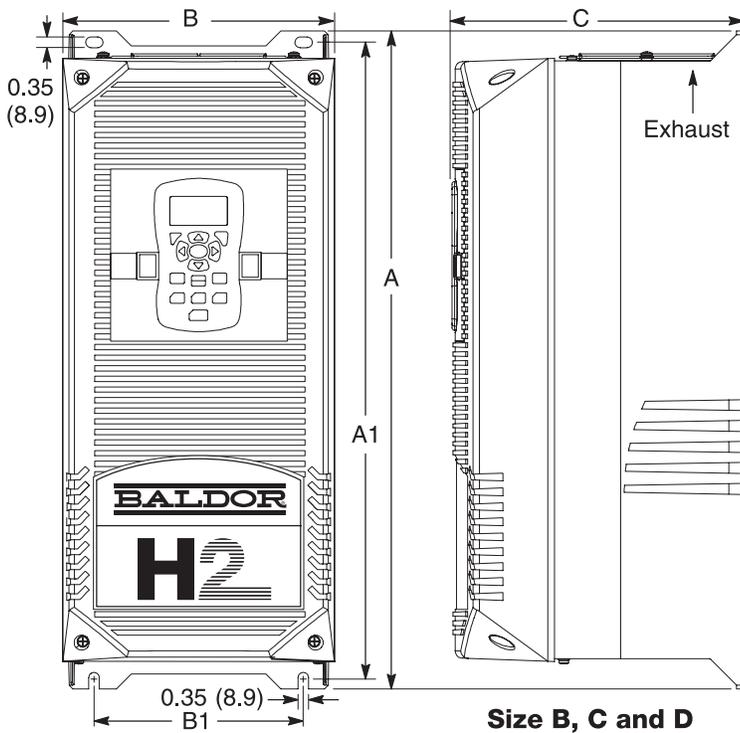

Size	# Holes	Diameter
B	3	0.6 (15)
	3	1.25 (32)
C	3	0.6 (15)
	3	1.68 (42)
D	3	0.6 (15)
	3	1.68 (42)

Size	Dimensions inches (mm)				
	Outside			Mounting	
	Height (A)	Width (B)	Depth (C)	Height (A1)	Width (B1)
AA	12.27 (311)	7.97 (202)	8.21 (208)	11.75 (298)	7.38 (187)
B	18.00 (457)	9.10 (231)	9.77 (248)	17.25 (438)	7.00 (178)
C	22.00 (559)	9.10 (231)	9.77 (248)	21.25 (540)	7.00 (178)
D	28.00 (711)	11.50 (292)	13.00 (330)	27.25 (692)	9.50 (241)



Contact your nearest Baldor District Office at these world-wide locations, or visit [www.baldor.com](http://www.baldor.com)

**UNITED STATES**

**ARIZONA**  
**PHOENIX**  
4211 S 43RD PLACE  
PHOENIX, AZ 85040  
PHONE: 602-470-0407  
FAX: 602-470-0464

**ARKANSAS**  
**CLARKSVILLE**  
1001 COLLEGE AVE.  
CLARKSVILLE, AR 72830  
PHONE: 479-754-9108  
FAX: 479-754-9205

**CALIFORNIA**  
**LOS ANGELES**  
6480 FLOTILLA  
COMMERCE, CA 90040  
PHONE: 323-724-6771  
FAX: 323-721-5859

**HAYWARD**  
21056 FORBES STREET  
HAYWARD, CA 94545  
PHONE: 510-785-9900  
FAX: 510-785-9910

**COLORADO**  
**DENVER**  
2520 W BARBERRY PLACE  
DENVER, CO 80204  
PHONE: 303-623-0127  
FAX: 303-595-3772

**CONNECTICUT**  
**WALLINGFORD**  
65 SOUTH TURNPIKE ROAD  
WALLINGFORD, CT 06492  
PHONE: 203-269-1354  
FAX: 203-269-5485

**FLORIDA**  
**TAMPA/PUERTO RICO/  
VIRGIN ISLANDS**  
3906 EAST 11TH AVENUE  
TAMPA, FL 33605  
PHONE: 813-248-5078  
FAX: 813-247-2984

**GEORGIA**  
**ATLANTA**  
62 TECHNOLOGY DR.  
ALPHARETTA, GA 30005  
PHONE: 770-772-7000  
FAX: 770-772-7200

**ILLINOIS**  
**CHICAGO**  
1601 FRONTENAC ROAD  
NAPERVILLE, IL 60563  
PHONE: 630-848-5100  
FAX: 630-848-5110

**INDIANA**  
**INDIANAPOLIS**  
5525 W. MINNESOTA STREET  
INDIANAPOLIS, IN 46241  
PHONE: 317-246-5100  
FAX: 317-246-5110

**IOWA**  
**DES MOINES**  
1800 DIXON STREET, SUITE C  
DES MOINES, IA 50316  
PHONE: 515-263-6929  
FAX: 515-263-6515

**MARYLAND**  
**BALTIMORE**  
6660 SANTA BARBARA RD.  
SUITE 22-24  
ELKBRIDGE, MD 21075  
PHONE: 410-579-2135  
FAX: 410-579-2677

**MASSACHUSETTS**  
**BOSTON**  
6 PULLMAN STREET  
WORCESTER, MA 01606  
PHONE: 508-854-0708  
FAX: 508-854-0291

**MICHIGAN**  
**DETROIT**  
33782 STERLING PONDS BLVD.  
STERLING HEIGHTS, MI 48312  
PHONE: 586-978-9800  
FAX: 586-978-9969

**GRAND RAPIDS**  
668 3 MILE ROAD NW  
GRAND RAPIDS, MI 49504  
PHONE: 616-785-1784  
FAX: 616-785-1788

**MINNESOTA**  
**MINNEAPOLIS**  
21080 134TH AVE. NORTH  
ROGERS, MN 55374  
PHONE: 763-428-3633  
FAX: 763-428-4551

**MISSOURI**  
**ST LOUIS**  
422 INDUSTRIAL DRIVE  
MARYLAND HEIGHTS, MO 63043  
PHONE: 314-298-1800  
FAX: 314-298-7660

**KANSAS CITY**  
1501 BEDFORD AVENUE  
NORTH KANSAS CITY, MO 64116  
PHONE: 816-587-0272  
FAX: 816-587-3735

**NEW YORK**  
**AUBURN**  
ONE ELLIS DRIVE  
AUBURN, NY 13021  
PHONE: 315-255-3403  
FAX: 315-253-9923

**NORTH CAROLINA**  
**GREENSBORO**  
1220 ROTHERWOOD ROAD  
GREENSBORO, NC 27406  
P O BOX 16500  
GREENSBORO, NC 27416  
PHONE: 336-272-6104  
FAX: 336-273-6628

**OHIO**  
**CINCINNATI**  
2929 CRESCENTVILLE ROAD  
WEST CHESTER, OH 45069  
PHONE: 513-771-2600  
FAX: 513-772-2219

**CLEVELAND**  
8929 FREEWAY DRIVE  
MACEDONIA, OH 44056  
PHONE: 330-468-4777  
FAX: 330-468-4778

**OKLAHOMA**  
**TULSA**  
2 EAST DAWES  
BIXBY, OK 74008  
PHONE: 918-366-9320  
FAX: 918-366-9338

**OREGON**  
**PORTLAND**  
20393 SW AVERY COURT  
TUALATIN, OR 97062  
PHONE: 503-691-9010  
FAX: 503-691-9012

**PENNSYLVANIA**  
**PHILADELPHIA**  
1035 THOMAS BUSCH  
MEMORIAL HIGHWAY  
PENNNSAUKEN, NJ 08110  
PHONE: 856-661-1442  
FAX: 856-663-6363

**PITTSBURGH**  
616H BEATTY ROAD  
MONROEVILLE, PA 15146  
PHONE: 412-380-7244  
FAX: 412-380-7250

**TENNESSEE**  
**MEMPHIS**  
4000 WINCHESTER ROAD  
MEMPHIS, TN 38118  
PHONE: 901-365-2020  
FAX: 901-365-3914

**TEXAS**  
**HOUSTON**  
4647 PINE TIMBERS  
SUITE # 135  
HOUSTON, TX 77041  
PHONE: 713-895-7062  
FAX: 713-690-4540

**DALLAS**  
3040 QUEBEC  
DALLAS, TX 75247  
PHONE: 214-634-7271  
FAX: 214-634-8874

**UTAH**  
**SALT LAKE CITY**  
2230 SOUTH MAIN STREET  
SALT LAKE CITY, UT 84115  
PHONE: 801-832-0127  
FAX: 801-832-8911

**WISCONSIN**  
**MILWAUKEE**  
2725 SOUTH 163RD STREET  
NEW BERLIN, WI 53151  
PHONE: 262-784-5940  
FAX: 262-784-1215

**INTERNATIONAL SALES**  
**FORT SMITH, AR**  
P.O. BOX 2400  
FORT SMITH, AR 72902  
PHONE: 479-646-4711  
FAX: 479-648-5895

**CANADA**  
**EDMONTON, ALBERTA**  
4053-92 STREET  
EDMONTON, ALBERTA T6E 6R8  
PHONE: 780-434-4900  
FAX: 780-438-2600

**OAKVILLE, ONTARIO**  
2750 COVENTRY ROAD  
OAKVILLE, ONTARIO L6H 6R1  
PHONE: 905-829-3301  
FAX: 905-829-3302

**MONTREAL, QUEBEC**  
1844 WILLIAM STREET  
MONTREAL, QUEBEC H3J 1R5  
PHONE: 514-933-2711  
FAX: 514-933-8639

**VANCOUVER,  
BRITISH COLUMBIA**  
1538 KEBET WAY  
PORT COQUITLAM, BC V3C 5M5  
PHONE: 604-421-2822  
FAX: 604-421-3113

**WINNIPEG, MANITOBA**  
54 PRINCESS STREET  
WINNIPEG, MANITOBA R3B 1K2  
PHONE: 204-942-5205  
FAX: 204-956-4251

**AUSTRALIA**  
UNIT 3, 6 STANTON ROAD  
SEVEN HILLS, NSW 2147,  
AUSTRALIA  
PHONE: (61) (2) 9674 5455  
FAX: (61) (2) 9674 2495

UNIT 8, 5 KELLETT'S ROAD  
ROWVILLE, VICTORIA, 3178  
AUSTRALIA  
PHONE: (61) (3) 9753 4355  
FAX: (61) (3) 9753 4366

**AMÉRICA DEL SUR**  
APTDO. 0818-00440  
CIUDAD DE PANAMÁ, PANAMÁ  
PHONE: +507 261-5347  
FAX: +507 261-5355

**CENTRO AMÉRICA Y CARIBE**  
RESIDENCIAL PINARES DE SUJIZA  
POL. 15 #44,  
NVA. SAN SALVADOR, EL SALVADOR  
PHONE: +503 2288-1519  
FAX: +503 2288-1518

**CHINA**  
SHANGHAI JIAHUA BUSINESS CENTER  
ROOM NO. A-8421  
808 HONG QIAO ROAD  
SHANGHAI 200030  
PHONE: 86-21-64473060  
FAX: 86-21-64078620

**GERMANY**  
DIESELSTRASSE 22  
D-85551 KIRCHHEIM  
MUNICH, GERMANY  
PHONE: +49 89 90 5080  
FAX: +49 89 90 50 8492

**INDIA**  
14, COMMERCE AVENUE  
MAHAGANESH COLONY  
RAUD ROAD  
PUNE - 411 038  
MAHARASHTRA, INDIA  
PHONE: 91 20 25 45 95 31  
FAX: 91 20 25 45 95 30

**ITALY**  
BALDOR ASR AG  
SUCCURSALE DI MENDRISIO  
VIA BORROMINI, 20A  
CH-6850 MENDRISIO  
SWITZERLAND  
PHONE: 0041 91 640 99 50  
FAX: 0041 91 630 26 33

**JAPAN**  
DIA BLDG 802,  
2-21-1 TSURUYA-CHO,  
KANAGAWA-KU  
YOKOHAMA, 221-0835, JAPAN  
PHONE: 81-45-412-4506  
FAX: 81-45-412-4507

**KOREA**  
ROOM 208-37  
INCHEON INDUSTRIAL GOODS  
CIRCULATING CENTER  
SONGHYEON 3-DONG, DONG-GU  
INCHEON, KOREA, 401-705  
PHONE: 82 32 588 3253  
FAX: 82 32 588 3254

**MÉXICO**  
KM. 2.0 BLVD. AL AEROPUERTO  
LEÓN 37545, GUANAJUATO,  
MÉXICO  
PHONE: 52 477 761 2030  
FAX: 52 477 761 2010

**MIDDLE EAST & NORTH AFRICA**  
VSE INTERNATIONAL CORP.  
3233 NORTH ARLINGTON HEIGHTS  
SUITE 100W  
ARLINGTON HEIGHTS, IL 60004  
PHONE: 847 590 5547

**SINGAPORE**  
51 KAKI BUKIT ROAD 2  
K B WAREHOUSE COMPLEX  
SINGAPORE 417863  
PHONE: (65) 6 744 2572  
FAX: (65) 6 747 1708

**SWITZERLAND**  
POSTFACH 73  
SCHUTZENSTRASSE 59  
CH-8245 FEUERTHALEN  
SWITZERLAND  
PHONE: +41 52 647 4700  
FAX: +41 52 659 2394

**TAIWAN**  
1F, NO 126 WENSHAN 3RD STREET,  
NANTUN DISTRICT, TAICHUNG CITY 408  
TAIWAN (R.O.C)  
PHONE: +886 4238 04235  
FAX: +886 4238 04463

**UNITED KINGDOM**  
6 BRISTOL DISTRIBUTION PARK  
HAWKLEY DRIVE  
BRISTOL BS32 0BF U.K.  
PHONE: +44 1454 850000  
FAX: +44 1454 859001

**Baldor Electric Company**

P.O. Box 2400, Fort Smith, AR 72902-2400 U.S.A.

Ph (479) 646-4711 • Fax (479) 648-5792

International Fax (479) 648-5895

[www.baldor.com](http://www.baldor.com)

